

**PUV74002-PUVX4002 UHF VERTICAL POL. 4 DIPOLES PANEL (I 230EV-2)**



UHF Band	Operative Frequency 470 - 806 MHz	Input: 7/8" EIA 7-16 DIN
----------	--------------------------------------	-----------------------------

**MAIN FEATURES**

Product code: PUV74002 (7/8" IN) - PUVX4002 (7-16 IN)

**Electrical characteristics**

Frequency Range	470 - 806 MHz
Input impedance	50 OHM
Polarization	Vertical
Gain	11 dBd (@ 650 MHz)
VSWR	<1.1
Max input Power PUV74002	2.5 (@650 MHz)
Max input Power PUVX4002	1.0 (@650 MHz)

all metal parts are ground connected


**Mechanical characteristics**

Input Connector PUV74002	EIA 7/8" (swivel)
Input Connector PUVX4002	DIN 7-16 female
Weight/Mass	117.6 N (12 Kg   26.4 lbs)
Wind loads (wind=160 Kph)	565 N (Front thrust) 250 N (Side thrust)
Max Wind (survival)	200 Kph
Operating temperature	-50°C to +60°C
Pressurization (NOT for 7-16 input version)	100 KPa (1 Atm)
Mounting (Pole Brackets optional)	Tower face/Custom Mast

**Materials**

Back reflector	Inox Steel
Internal Lines/ Dipoles	Silver Plated Brass/Copper
Radome	Fiberglass
Hardware	Inox Steel AISI304

**E/EM Radiation Patterns**

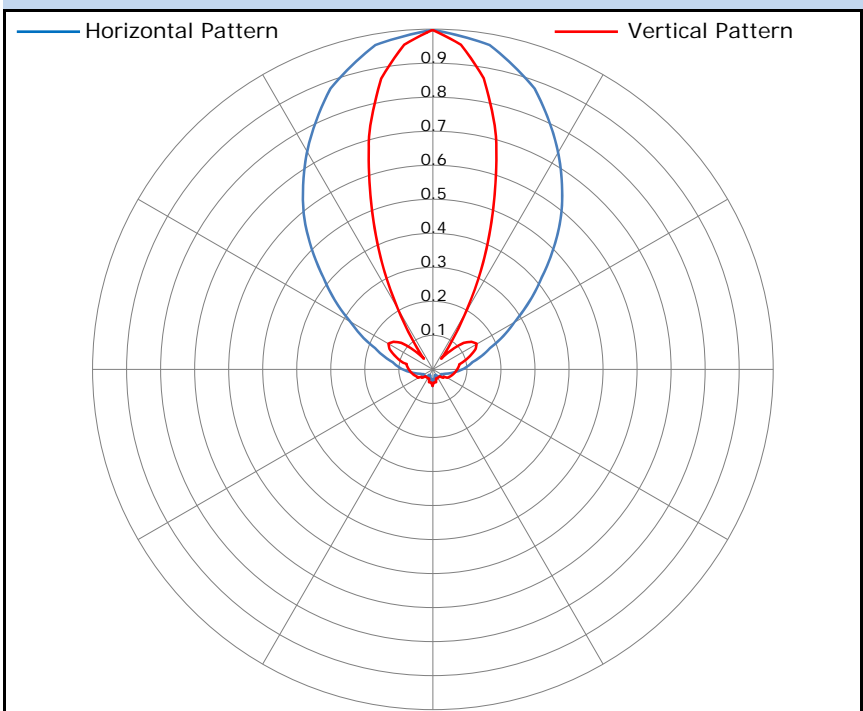

W=500 mm / H=1000 mm / D= 190 mm

I dati contenuti nel presente datasheet possono variare senza preavviso  
Data on this datasheet can vary without previous notice